




PRT

The universal female LINDAL valve for all technical and cosmetic products as well as insecticides and air fresheners.

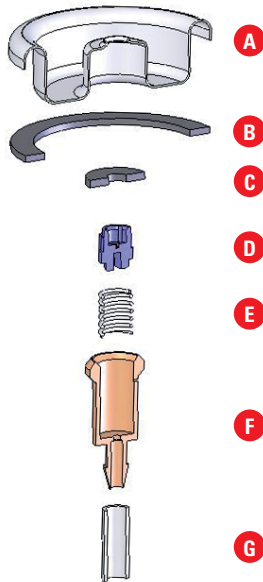

Female valve PRT

Actuator: For use with all female, cup filling actuators

Standard specifications:

- A Mounting Cup** Plain tinplate, eponlacquered
Plain tinplate, eponlacquered with dimples
Plain tinplate, eponlacquered with dimples, high dome
- B Outer Gasket** Nitrile
- C Inner Gasket** Nitrile, Neoprene, Butyl, Chlorobutyl
- D Valve seat** POM, natural
Dosage: 0,3 mm
0,5 mm
4 slot x 0,3mm
- E Spring** Stainless steel
- F Housing** Polyamide
Bore: 1,2mm RTP / 0,5 mm VPH
2mm RTP
2mm RTP / 0,33mm VPH
2mm RTP / 0,50mm VPH
- G Diptube** Polyethylene

More specifications on request

